

# Cement & Building Materials Conveying

Pneumatic Dense-Phase Cement & Building Materials Conveying Systems

**Macawber**

- No constantly moving parts. Very low maintenance.
- Power cost reduced by almost 50%. No motors, drives or screws required.
- Conveying velocity considerably reduced. Pipe wear reduced.
- Silo dust filters reduced in size. Cyclones eliminated.
- Based on technology widely used throughout the world since 1977.
- Suitable for cement, dry mortar mix, fly ash, gypsum and other building products.



## The Macawber Group

Since 1977 the Macawber Group has been developing **dense-phase pneumatic conveying systems** for demanding materials handling requirements in various process industries. This has resulted in significant improvements in conveying methods with reduced operating costs and improved equipment reliability.

The applications targeted have been for abrasive materials, high temperature materials, with high tonnage transfer and very long distance conveying.

The results have been impressive for the iron and steel, coal fired utilities, and minerals handling and mining industries.

This experience and proven technology is now focused on the cement industry to bring the same benefits and to provide an effective alternative to outdated conveying methods.

Dense-phase pneumatic conveying relies on transferring materials at much lower velocities than normally experienced with screw pump conveying technology. The reason is that the Macawber conveying process does not depend on complete fluidisation of the cement and complete mixing of the cement with the conveying air.

Instead the cement is transferred largely as a mass without depending on air mixing. This achieves a much higher pipeline loading and much lower cement conveying velocity.

The above is achieved with a simple pressure vessel that unlike screws does not contain any moving parts such as drives, motors, bearings or screws that are continuously worn from the high-speed movement of the product.

The savings in power and maintenance are dramatic and worth careful consideration.



T/150/12 Macpump

## The Technology

The objective is to achieve low material velocity along the pipeline and to use less energy in doing so as well as considerably reduce wear and maintenance.

Carefully managed line loading to fill the pipeline with cement without relying on fluidisation to move the material as a mass along the pipe at a lower transfer velocity makes all the difference to power cost and equipment wear.

The differences in conveying techniques are very important.

**Dense-Phase conveying is the present state of the art for moving abrasive materials.** Consider the differences:


### Dilute-Phase conveying

#### Average material velocity >100ft/second

Dilute phase conveying method relies on suspension of the cement in an air stream. This means mixing the cement powder with the conveying air so that it is completely homogenous. Although this sounds simple it requires much more energy to provide the high volumes of conveying air to do this.

Clearly the efficiency is low because the pipeline is transferring mostly air and not cement.

- **High energy cost**
- **High maintenance cost**
- **High overall cost**

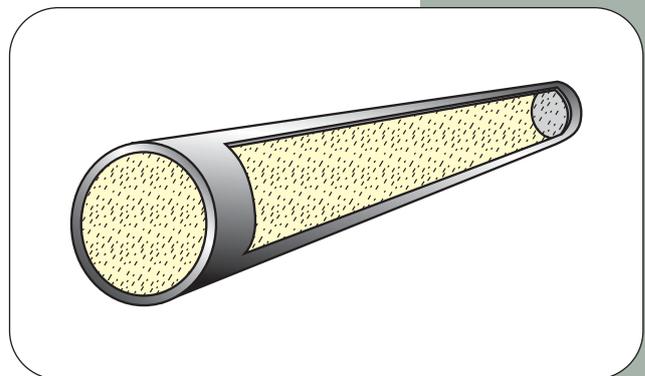


### Dense-Phase. Moving Bed conveying

#### Average material velocity 10-30ft/second

The velocity in a moving bed-conveying regime is in the range of 10-30ft/sec. Macawber systems generally convey at the lower end of this range. Apart from saving energy, the moving bed method greatly reduces pipe wear. Generally, ordinary schedule 40 carbon steel pipe and wear resistant (e.g. basalt lined) bends can be used.

- **Savings in energy cost**
- **Savings in maintenance cost**
- **Overall cost savings**

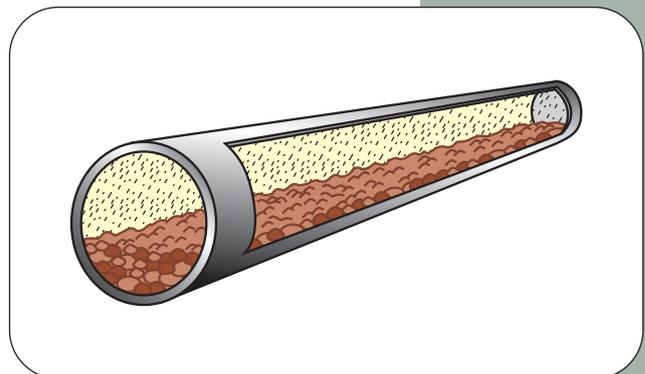


### Dense-Phase. Slug Flow Conveying

#### Average material velocity 3-10ft/second

The material velocity is in the range of 3-10ft/second with another drop in energy consumption and even longer pipeline life. Almost always schedule 40 carbon steel pipe is used.

- **Maximum energy savings**
- **Lowest maintenance cost**
- **Lowest overall cost**

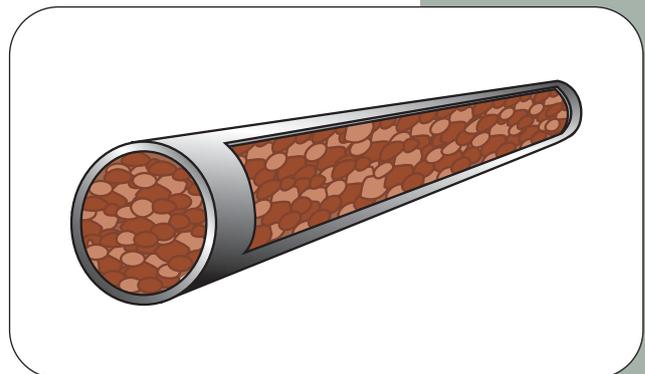

## New Technology Achieves Lower Operating Cost

Macawber Engineering has developed a well-proven group of technologies for handling cement and other building products with the objective of achieving the lowest possible operating cost. Operating costs can be classified into two main groups; energy lost and maintenance costs.

### Energy costs

Macawber systems are low in energy consumption. Firstly the large motor that is familiar to users of long distance screw pump systems is totally eliminated in the Macawber systems. Secondly, in shorter distance systems of 1000ft and below, Macawber's Cementveyor system has reduced the conveying air consumption (and hence energy consumption) to a minimum by optimising the material-to-air ratio. The combination of these factors has led in some cases to a halving of previously accepted energy costs.

### Maintenance costs


The elimination of the screw pump motor has led to significant savings in maintenance; in fact, all continuously rotating parts have been completely eliminated in Macawber systems. This has resulted in the reduction of part replacement and the labour cost associated with high maintenance systems such as screw pumps.

## The Old and the New. Comparisons of Features

Feature	Screw Pump	Macawber Technology
Transfer rates to 400 tons/hour	YES	YES
Distances to 5000ft (1600 M)	YES	YES
Requires High Speed rotating parts	YES	NO
Requires Large Pump Motor	YES	NO
Energy Consumption/ton	HIGH	LOW
Maintenance Cost	HIGH	LOW
Overall Operating Cost	HIGH	LOW

## The Old and the New. Comparison of Performance

Application Example 50 tons/hour and 200ft (65 M)	Screw Pump	Rotary Valve	Macawber Technology
Average Material Velocity ft/min (M/sec.)	2592 (13.5)	3840 (20.0)	1440 (7.5)
Material to Air ratio	8.5	7.5	10.5
Energy Consumption Kwatt per ton transferred	2.4	3.8	1.5
Pipe Preservation Guarantee	NO	NO	YES
Uses Heavy duty pipe	YES	YES	NO
Dust Filter Size	LARGE	LARGE	SMALL

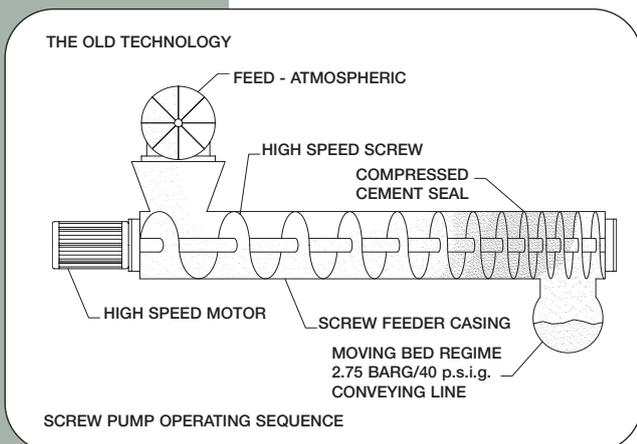

## The Screw Pump

The screw pump was introduced for cement handling about 75 years ago. Cement is continuously fed into a high speed screw. The screw is designed so that a pressure boundary is formed between the inlet and discharge of the pump. As the cement is discharged into the pipeline it is fluidised for conveying. The pump screw is powered by a large motor. The energy required for the motor is additional to the energy required to produce the conveying air. There is considerable wear to the screw itself due to the high rotational speed and also to the screw support bearings and the screw chamber.

## The new Technology A System Type to Meet Every Handling Requirement

Macawber's group of technologies can provide a system to address any application requirement. For short or long conveying distances the **Variflo** and the **Macpump** are capable conveying cement at high tonnage rates with low operating costs. The **Cementveyor** system has been designed for conveying moderate tonnage rates at distances below 1000ft and provides very efficient use of conveying air.

### The Cementveyor





The Cementveyor is a single vessel, dense phase transporter. The system is designed to produce high material-to-air-ratios and low conveying velocities for cement conveying. The Cementveyor comprises a small pressure vessel fitted with the unique Macawber **Dome® Valve** for vessel filling. The Dome Valve is the only moving part in the system and moves through 90° to a fully open unrestricted filling position. When closed, the valve is pneumatically sealed. The Cementveyor continuously cycles as often as necessary to meet the specified conveying rate. A pressure sensor determines when the cycle is complete and the air supply is turned off. The conveyor is then ready for re-filling and a new conveying cycle proceeds.

### Variflo

The Variflo is a single vessel, dense-phase transporter. The system is designed to refill at the same time as cement is being conveyed through the pipeline. Cement conveying is close to continuous and the total loading in the line is controlled by a modulating **Dome® Valve** on the discharge of the machine. The modulating valve controls the flow of cement into the conveying line in response to conveying pressure. This method allows conveying distances of 3000ft and greater. The Variflo is suitable for conveying cement, fly ash, lime, limestone and other powders and fine granules.

### Macpump

The Macpump is a twin vessel system designed to provide high conveying rates up to 300 T/H and distances of 3000ft and higher. The principle of operation is simple and involves only two moving parts per vessel (the inlet and outlet **Dome® Valves**). As the first vessel is filling with cement the second vessel is discharging into the conveying line. This provides for completely continuous conveying with discharge into the line via a modulating valve as for the **Variflo**. When the second vessel has been discharged, it is vented back to atmospheric pressure and refilled. Meanwhile the first vessel commences discharge into the conveying line. This is a continuous process, optimising the conveying rate and material-to-air-ratio. The Macpump is suitable for conveying cement, fly ash, lime, limestone and other powders and fine granules.

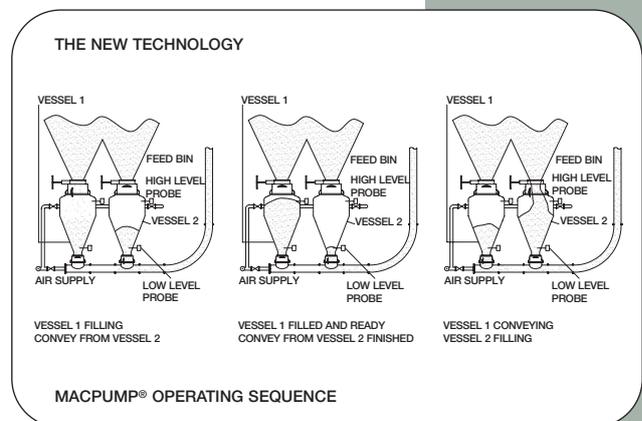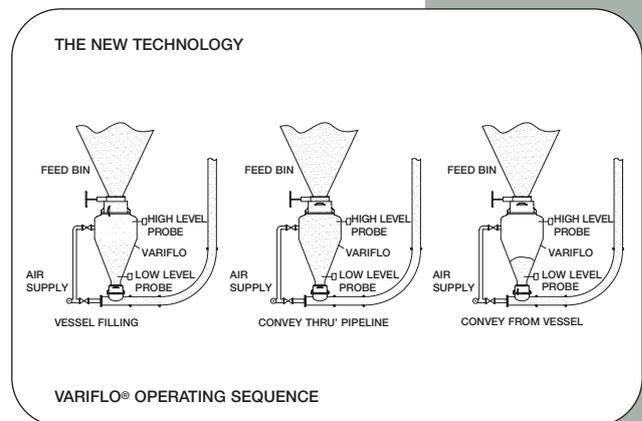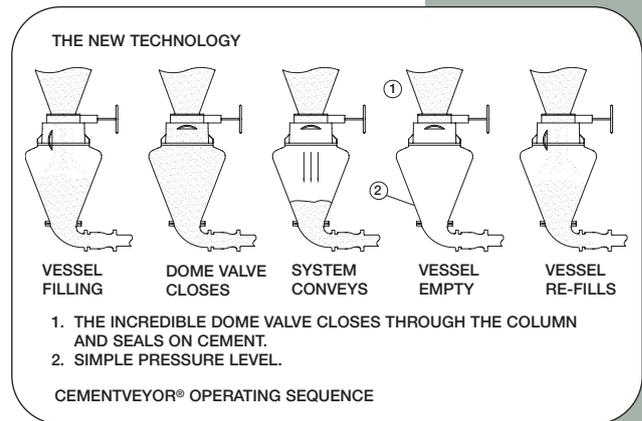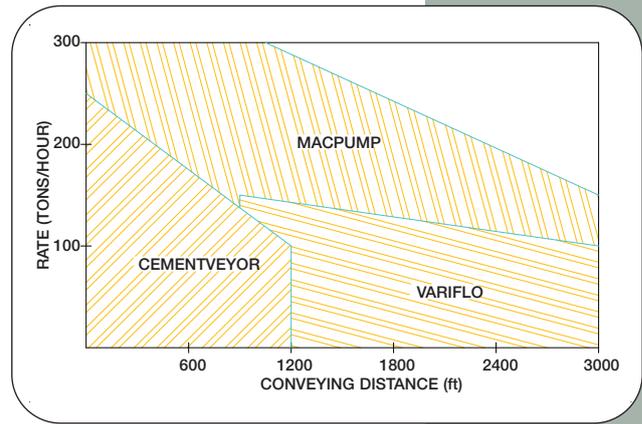



## The Dome® Valve

1. The Dome Valve® was introduced and patented in 1978 for the sole purpose of providing long life and reliability when handling hot and abrasive materials. The unique inflatable seal traps abrasive particles on closing preventing their movement under the effect of the pressure differential. This action ensures wear resistance from particles, operating reliability and valve performance.

2. Continuous development over the years with additional patents and innovations has developed the market for the valve to many applications. In addition the valve is widely used to retrofit ash valves requiring high maintenance or frequent replacement.

3. The operating sequence of the Dome® valve is very simple and effective; The spherical component rotates 90 to pass through a static or moving column of abrasive ash to the closed position where an inflatable seal is pressurised to entrap particles and prevent their movement. The inflatable seal reliably achieves a pressure differential of 7barg (100psi) at a high temperature.

4. The standard size range is 2" to 16" and 670°F with inline configuration for pipeline service or bulkhead configuration for pressure vessel inlet. Special Dome® Valves are available to 30" and 43 barg (623.5psi) with a range of materials of construction.

Dome® Valve Closure and Seal comparison with other valve types				
Function:	Knife Gate Valve	Butterfly Valve	Ball Valve	Dome® Valve
Closing member away from material flow	YES	NO	YES	YES
Close without jamming on column of material	NO	NO	NO	YES
Close and seal on column of material	NO	NO	NO	YES
Dome® Valve Pressure Comparison with other valve types				
Seal Bubble Tight to:	Knife Gate Valve	Butterfly Valve	Ball Valve	Dome® Valve
14.5 psi (1 barg)	NO	NO	Maybe	YES
100 psi (7 barg)	NO	NO	NO	YES
623.5 psi (43 barg)	NO	NO	NO	YES
Combined Pressure and Vacuum	NO	NO	Maybe	YES

## Application Examples

### 1. Blue Circle, NSW, Australia

Model T/150/12 Macpump - Cement  
Model 8/8-4 Cementveyors - Cement  
125 T/H x 935ft

### 2. Green Island Cement, Hong Kong

Model 120/16-240/10 Macpump - Cement  
100 T/H x 1310ft

### 3. Mitsubishi Heavy Industries, Japan

Model 50/12-10 Denseveyor - Fly Ash  
30 T/H - 740ft

### 4. Omya UK

Model 12/12 Denseveyor - Gypsum  
22 T/H x 450ft

### 5. Fiddlers Ferry Power Station, UK

Model 3428/16-12 Denseveyor - Fly Ash  
120 T/H - 560ft

### 6. W.R. Grace Corp., Lexington, MA, USA

Model 8/8-5 Denseveyors - Gypsum  
10 T/H x 200ft

### 7. Cockburn Cement, WA, Australia

Model 20/12-8 Cementveyor - Cement  
30 T/H x 300ft

### 8. Ready-Mix Company, Trebol, Chile

Model 12/12-6 Cementveyors - Cement  
25 T/H x 290ft

### 9. Kaiser Cement, San Antonio, TX, USA

Model 20/12-8 Cementveyor - Cement  
25 T/H x 500ft

### 10. Clow Water Systems, Coshocton, OH, USA

Model 2/4-2 Cementveyor - Cement  
5 T/H x 150ft



**Macawber Engineering, Inc**

1829 Clydesdale Street  
 Maryville, Tennessee 37801  
 USA  
 Tel: +1 865 984 5286  
 Fax: +1 865 977 4131  
 macawber@macawber.com

**Mactenn Systems Limited**

One Bull Lane, Acton, Sudbury,  
 Suffolk CO10 0BD  
 UK  
 Tel: +44 1787 882 422  
 Fax: +44 1787 882 433  
 sales@mactenn.com

**Macawber China**

Wusi Farm, Feng Xian,  
 Shanghai 201422  
 CHINA  
 Tel : +86 21 571 60541  
 Fax: +86 21 571 66248  
 macawber@macawber.com.cn

**Macawber Engineering Systems  
 India Private Ltd.**

131 Hindustan Kohinoor Complex,  
 L.B.S. Marg, Vikhroll (West)  
 Mumbai – 400 083  
 INDIA  
 Tel : +91 22 6796 9655  
 Fax: +91 22 2579 4624  
 sales@macawberindia.net

**Macawber Do Brazil (Licensee)**

Av. Dr. Pedro Lessa, 1.447 – Conj. 23  
 Santos – Sao Paulo  
 BRAZIL – CEP 11025-001  
 Tel : +55 13 3227 3380  
 Fax: +55 13 3271 3140  
 pdl@pdl.com.br

**Macawber Japan**

3-11-1, Shinmachi, Nishi-ku  
 Osaka 550  
 JAPAN  
 Tel : +81 66 538 9190  
 Fax: +81 66 533 2979  
 taiheisn@pearl.ocn.ne.jp



**Macawber**

**Macawber Engineering, Inc**

1829 Clydesdale Street, Maryville, Tennessee 37801 USA  
 Tel: +1 865 984 5286 Fax: +1 865 977 4131  
 macawber@macawber.com.cn  
 A Macawber Group Company

ISO 9001

Company Management  
 Quality Certification  
 (parent company)

ADVANCED PNEUMATIC CONVEYING SYSTEMS  
 CONTROLLED RATE INJECTION SYSTEMS  
 INFLATABLE SEAT VALVES



Pressure Vessel  
 Quality Assurance Certification

**Your Local Distributor:**



Product Safety requirements satisfy the  
 Directives of the European Commission.

